

# Top-Down Object-Based User Interface Definition and Design Paradigms

A P Y Y

*School of Cognitive and Computing Science,  
University of Sussex,  
Falmer,  
Brighton BN1 9QH  
United Kingdom  
n og*

**Abstract:** Currently, the main emphasis in User Interface design tools is on the low-level manipulation of Interaction Components, such as widgets. This paper proposes a design architecture which approaches User Interface development in a top-down manner, to avoid particular shortcomings in current design methodologies.

## 1.0 Introduction

Currently a great deal of attention is being devoted to producing tools to aid User Interface design - in particular the design of direct-manipulation interfaces, which are generally considered to be the hardest to produce [ 4 ]. The guiding philosophy behind many of the User Interface design tools currently being developed is to provide the sort of functionality found in direct-manipulation “drawing” packages within a system which produces a working User Interface. Combined with progress towards modularisation in User Interface components - for example “widgets” found in the X windowing system - this does offer a considerable reduction in the difficulty of producing a User Interface.

The vast majority of User Interface systems which currently exist implement interface elements procedurally - that is, a UI designer must produce a *program which, when run, produces the interface desired*. Hence a “widget drawing tool” such as those currently existing provides a level of insulation between the designer and this procedural level of User Interface description. Her task is further made easier by the provision of direct visual feedback while the User Interface is being constructed - thus making it much easier to get cosmetic details such as colour and layout right.

However this approach to aiding User Interface design is in conflict with current views on HCI, which emphasize examining the interface from the top downwards, and avoiding committing the design to any particular implementation for as long as possible. That these methods are desirable is not in question; however, a designer, using current User Interface development tools, must do all the top-level analysis by hand, and merely use the UIDT to help implement the final design which the other methods have produced. This paper suggests an architecture for a projected User Interface Design Tool which would allow a designer to perform a complete top-down design process within one unified tool.

## 2.0 Levels of description of a User Interface

There are a number of levels of description, of varying degrees of abstraction, which can be applied to a User Interface. It should be emphasised at this point that each of these descriptions can be considered complete in

itself - that is, any User Interface within reason may adequately be defined in, or designed using, any of the following formalisms. However, there are certain advantages in using high- rather than low-level formalisms; The resulting User Interface is less platform- and version-specific, and hence may be more easily ported onto other platforms or updated as new versions of the application are produced; more effort is required using a low-level formalism to make the resulting UI stylistically and functionally consistent.

As I mentioned above, almost all User Interfaces are, at the lowest level of description, eventually instantiated as imperative program code. By this I mean that at some point there exists a program which, when run, will effect the user interface. Note that this is not so in the case of, say a document produced by an object-orientated draw program, or of a document produced by a word processor, both objects in principle of comparable complexity to an interface we could conceive of generating with an "Interface Processor". Note also that declarative programming languages such as NeWs are still nonetheless programming languages, and there is still an abstraction inherent in their use - that is, there is still "code" which must be produced and then "run" to check the results. Note that until the adoption of Direct-Manipulation User Interfaces, there was virtually no theory of interaction at above this level.

The next level of description in a User Interface may be described as the "widget" level, since this is the level at which X11 widgets are declared. The interface is described in terms of a collection of primitive graphic objects which are slotted together (normally in a parent-child hierarchy) to create the desired effect. Some explicit programming is still required: A system call (or more than one in some cases) is required to generate each instance of a widget, and further calls are necessary in order to create the


“System Image”). The User, when he is using the system, similarly forms a model (the “User Model”) of what *he* believes is happening in response to his actions, and acts accordingly. Problems occur when, as frequently happens, the User Model which emerges differs from the model from which the designer was working. Just to make things a little more interesting, it’s surprisingly common for the System Image to differ (sometimes quite radically) from the Designer Model. Both Norman and Thimbleby give extensive examples of everyday systems in which this kind of design error occur (for example, see [ 3 ] and [ 7 ]).

### 3.0 Current theory on User Interface Design methods

From the theoretical principles stated above, as well as from existing engineering principles of structured design, a system has begun to be developed which recommends a methodology for structured User Interface design. The method specifies a series of stages which a design should undergo, beginning with the most abstract, and ending with the nearest level of abstraction to the actual User Interface itself. Note that there is no reason that this process is only applicable to the design of computer systems; most of the principles are equally applicable to the design of other devices, such as consumer appliances and vehicles (within the HCI literature, a great deal of attention tends to be devoted to the design of video recorders, microwave ovens and cars; possibly this reflects on the obsessions of HCI researchers).The suggested method is summarised in Fig. 3. I will briefly examine each stage involved in this process in order:

#### 4.0 Specify the Problem

At this stage of development, the designer should definitely not be thinking about implementing the required task; The only attention of the design process should be on examining the problem as it exists currently - i.e. before the new tool is developed. In the case of a totally new application, the designer should pay attention to the way the application domain is currently handled by other means; in the case of an existing application for which a new interface is being developed, it is fruitful to examine user’s qualitative experiences with preexisting systems. This process should yield a task description, which is of use in the next stage:

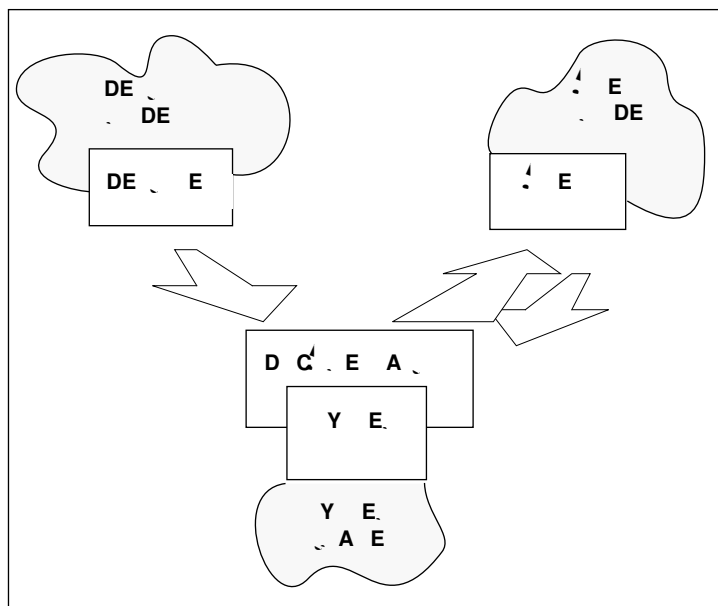

**Fig. 2. Norman’s “Three Models” (After Norman & Draper “User Centered System Design”, 1986, p.46)**

#### 5.0 Derive Requirements

Taking the task description, the designer should develop a requirements specification. This specification should examine what a user should be able to do with the application, what operations should be made easy to do (and in some cases what it is desirable to stop the user from doing). This information is used in the next stage:

#### 5.1 Produce Functional Design

At this stage in the design process, one finally begins to approach implementation issues. The functional specification should describe the things a user can do with an application, and give some indication of the mechanisms by which they may do each of them. However, the functional design should not look at actual implementation details; the same functional design should be implementable in a wide range of hardware environments, without alter-

## 6.0 The Problem

It is clear from the above that various advantages accrue from designing a User Interface from a top-down approach. Firstly, the interface is likely to be more consistent; it is disconcerting to have certain features, for example an “Undo” button present on some dialogs and not on others - if the designer decides on the abstract functionality of each of her “dialogs”, and then extends that to cover particular cases there is less chance that such stylistic clashes will occur.

In addition, many user interfaces may be very nicely engineered at a menus-and-buttons level, while exhibiting quite glaring flaws at higher levels of design. Norman’s concept of the “gulf of execution” comes in to play here [ 2 ]; there are occasions when the user understands very well how to operate the interface on a simple level, but is unable to find out how to do a particular oper-


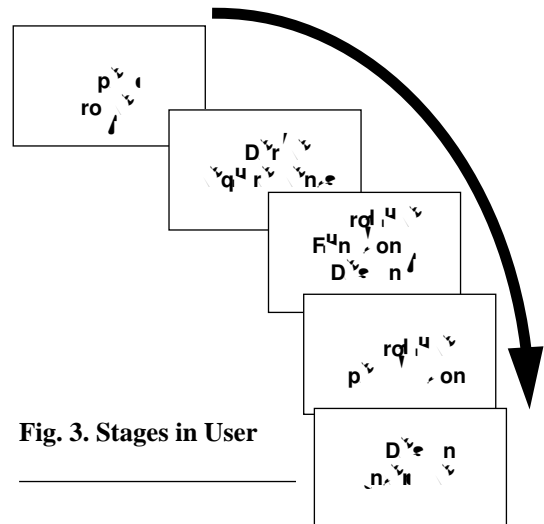


Fig. 3. Stages in User

Unfortunately the tools which currently exist to build user interfaces only aid the designer in step 5 of the diagram - actually constructing the interface. For the earlier (and very important) stages of design a computer system is of no more help than pencil and paper - and may in fact impede development by trammelling development in a similar direction as that of the computer system being used! The challenge, then, for the designer of a User Interface



**Fig. 4. The UIDE filetool**

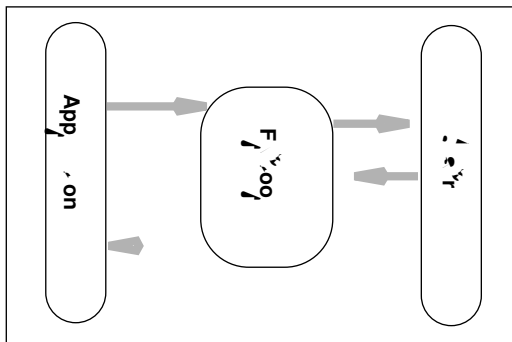

**Fig. 5. The Filetool as an FIC**

For example, consider the File Selector shown in Fig. 3: It is possible to describe this tool in Functional terms as the single Functional IC as shown in Fig 4; this FIC may be decomposed as shown in Fig. 5 (assuming the existence of Application and User objects):

Each of the subcomponents of the filetool is itself an FIC. Notice that the FICs labelled “List of Files in current directory” and “buttons” themselves have a substructure, and could in turn be decomposed. Note also that the filetool shown here is instantiated under the OpenLook widget set; the FICs could equally well be instantiated under a different look and feel while retaining the same functionality. Hence the designer is able to concentrate on top-level description of the interface, without getting bogged down in implementation-specific details, thus remaining in line with the principles proposed earlier.

FICs may be considered to be organised in a hierarchy arranged according to the type of information they send or receive. Research is still under way to produce a logical set of primary FIC classes which gracefully include all desired types of User Interface objects but it is clear that at the highest level of functional abstraction, there will not be many classes of FIC - probably less than 10. For example, Table 1 shows an (incomplete) enumeration, which results in 5 FIC taxa (additionally subdivided as to whether information flows from the User to the application or from the application to the user)

Another aspect of a User Interface which should be considered is the behavior of its components. An interface of any sophistication will inevitably have its own semantics independent of the application itself - certain buttons trigger certain menus, scrollbars alter the window shown by a container, resizing a viewport will entail changes in the settings of scrollbars etc. In addition, it is important for the designer that there is a uniform mechanism by which actions by the user on the User Interface are handled.

In a Widget-orientated User Interface, these are implemented as “events” which are applied to individual widgets; for example, when the user clicks on a button, a “select” event is sent to the button widget, causing some pre-defined behavior. Functional ICs also recognise events; but whereas a widget’s event is intimately related to the widget itself, generally being specific to an individual widget-set for example, the “functional events” which an FIC will experience are expressed in terms of the abstract effect on the interface, and should not be specific to particular interaction components. These functional events are implemented as object-orientated messages;

For example, consider the control panel in Fig. 7.; two of the settings, “Garbage collector copy” and “Garbage collector trace” are simple boolean values which the user may set. It happens in this case that the designer



**Fig. 7. The Poplog Properties Sheet**

## 8.0 Conclusion and future plans

Top-Down interface definition offers the same sort of advantages for an interface designer as structured programming did for a high-level-language programmer when it was first introduced. What is required now are tools to enable a designer to use these methods without extra work; and theoretical work on the best ways to abstract the behaviour of user interface components in a natural and powerful way. My project's solution - largely in terms of dataflows - appears at this time to be a good one, but future research may reveal better approaches.

In the UIDE project, work is currently underway at the planning stage to refine the concept of Functional ICs and to produce a graceful infrastructure for their description. We are also looking at extending the paradigm to allow for direct manipulation interaction techniques - dragging with the mouse, rubber-band selection etc., and in producing the graphical paradigm by which a User Interface design process would itself become a direct manipulation operation.

There is obviously a long way to go before computerised tools exist to aid the designer in all areas of Interface design; however in our research we are at least attempting to go one step up the ladder.

## 9.0 Acknowledgements

This work is supported as part of the DTI/SERC project "User Interface Design Environment", Project No. IED/4/1/1577. Partners on this project are as follows:

The School of Cognitive and Computing Science, University of Sussex:

Dr. Phil Husbands,  
Mr. Ian Rogers  
Mr. Andy Holyer.

The School of Computer Science, University of Birmingham:

Prof. Aaron Sloman.

Integral Solutions Ltd.:

Dr Alan Montgomery,  
Dr Tom Khabaza,  
Mr. Julian Clinton,  
Mr. Ben Rabau.

British Maritime Technology Ltd.:

Dr. M. A. Lahoud,  
Dr. Jonathan. Cunningham.

## 10.0 References:

- [ 1 ] T.R.G. Green, “*Describing information artifacts with cognitive dimensions and structure maps*” in “*Proceedings of HCI’91: Usability Now, Annual Conference of BCS Human-Computer Interaction Group*”, Cambridge University Press, 1991
- [ 2 ] Donald A Norman, “*Cognitive Engineering*” in Norman and Draper, “*User Centered System Design*”, 1986 esp. pp. 45-48
- [ 3 ] Donald A Norman, “*The Design of Everyday Things*” (formally published as “*The Psychology of Everyday Things*”), 1988, pp. 14-17
- [ 4 ] Brad A. Myers, “*User Interface Tools: Introduction and Survey*”, IEEE Software, January 1989
- [ 5 ] Harold Thimbleby, “*User Interface Design*” ACM Press 1990 p 130
- [ 6 ] **ibid**, pp124-131
- [ 7 ] Harold Thimbleby and Ian H. Witten, *User Modelling as Machine Identification: New Design Methods for HCI*”, University of Calgary Department. of Computer Science Research Report No. 91/436/20 (Especially Example 2 on p.3)

**Table 1: ICs Categorised by type of data flow**

Direction:	Type of data carried	Potential ICs
<i>user ⇒ application</i>	Trigger	Button (Non-Latching)
<i>user ⇒ application</i>	Boolean	Button (Latching), Switch, Check Box
<i>user ⇒ application</i>	Choice (1 of n)	Radio Button, List, Menu (Pop-Up or PullDown)
<i>user ⇒ application</i>	Integer	Fill-In field, Increment/Decrement buttons, Sliders
<i>user ⇒ application</i>	Continuous value	Slider, (physical) dial, Mouse (controlling a pair of values, or ignoring one dimension), Joystick (ditto), TrackBall (ditto)



**Table 1: ICs Categorised by type of data flow**

Direction:	Type of data carried	Potential ICs
$user \Rightarrow application$	Text	<b>Various Sorts</b> of text fields (different manners of editing, scrolling, etc.) Handwriting/Speech Recognition?
$user \Leftarrow application$	Trigger	Bell, Screen Flash, Altered/flashing Icon...
$user \Leftarrow application$	Boolean	Highlighted Button, Altered Icon.
$user \Leftarrow application$	Choice (1 of n)	“Label” field, counter, gauge, colour coding...
$user \Leftarrow application$	Integer	Numeric Field, counter, bar-Chart, Histogram, graph, dial...
$user \Leftarrow application$	Real	As for Integer, with more detail; (also implementation differences)
$user \Leftarrow application$	Text	Static Text field, scrolling text field (scrolling left- right or up-down? with scroll- bars?)...